

Application

The HJ-645 inverted louver blade equipment screen provides an effective and attractive sight screen around equipment and is designed for both interior and exterior installations. The HJ-645 is available in a wide array of finishes including custom color matching.

Standard Construction

Material: Mill finish 6063-T5 extruded aluminum.

Frame: 2" × 1½" × 0.081" thick (51 × 38 × 2) angle.

Blades: 45° × 0.081" (2) thick J-style.

Mullion: Visible.

Minimum Size: 12" × 12" (305 × 305).


Maximum Size: Single section: 72" × 144" (1829 × 3658).
144" × 72" (3658 × 1829).
Multiple section: Unlimited

Options

- Factory finish:
 - High Performance Fluoropolymer - 100% resin Newlar®/ 70% resin Kynar®
 - Baked Enamel
 - Clear or Color Anodized, Class 1
 - Prime Coat
- Heavy duty 0.125" (3) construction.
- Welded construction.
- Hinged frame.

Ratings

Free Area: [48" × 48" (1222 × 1222) unit]: 8.0 ft² (0.74 m²)
50.0%

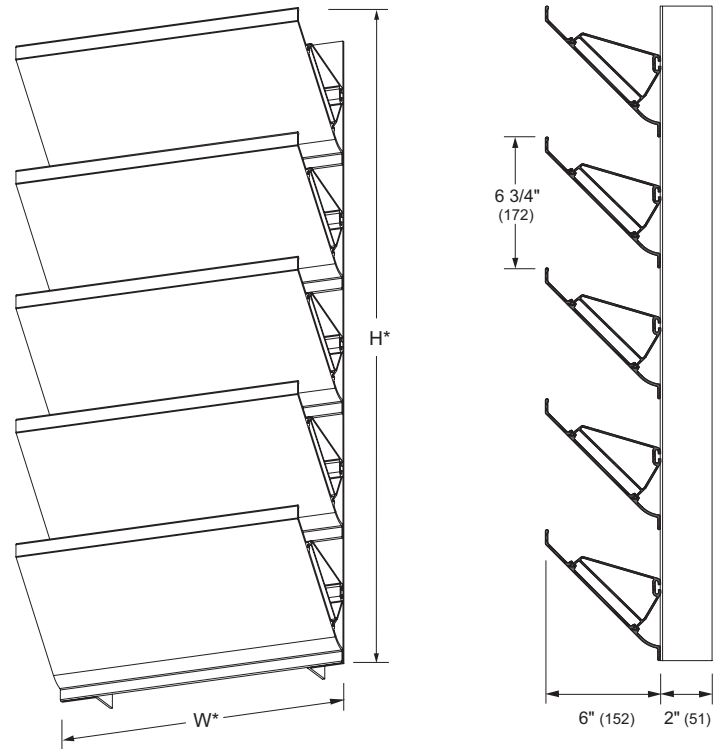


Model HJ-645


(standard)

*Dimensions furnished approximately 1/2" (13) undersize.

Vertical Section



Vertical Mullion
(standard)

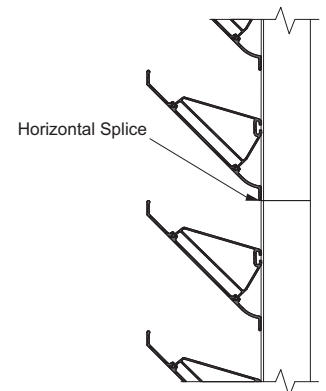

Horizontal Mullion
(standard)