

Application

The HZ-200 equipment screen offers a unique concealed support system that ensures proper structural support while maintaining a true continuous horizontal blade look without the use of unsightly frames or vertical angles. The HZ-200 is available in a wide array of finishes including custom color matching.

Standard Construction

Material: Mill finish 6063-T5 extruded aluminum.

Frame: 2" × 1 1/2" × 0.081" thick (51 × 38 × 2) angle.

Blades: 0.081" (2) thick horizontal cladding style.

Mullion: Visible.

Minimum Size: 12" × 12" (305 × 305).


Maximum Size: Single section: 72" × 144" (1829 × 3658).
 144" × 72" (3658 × 1829).
 Multiple section: Unlimited

Options

- Factory finish:
 - High Performance Fluoropolymer - 100% resin Newlar®/ 70% resin Kynar®
 - Baked Enamel
 - Clear or Color Anodized, Class 1
 - Prime Coat
- Welded construction.
- Hinged frame.

Ratings


Free Area: [48" × 48" (1222 × 1222) unit]: 3.1 ft² (0.29 m²)
 19.4%

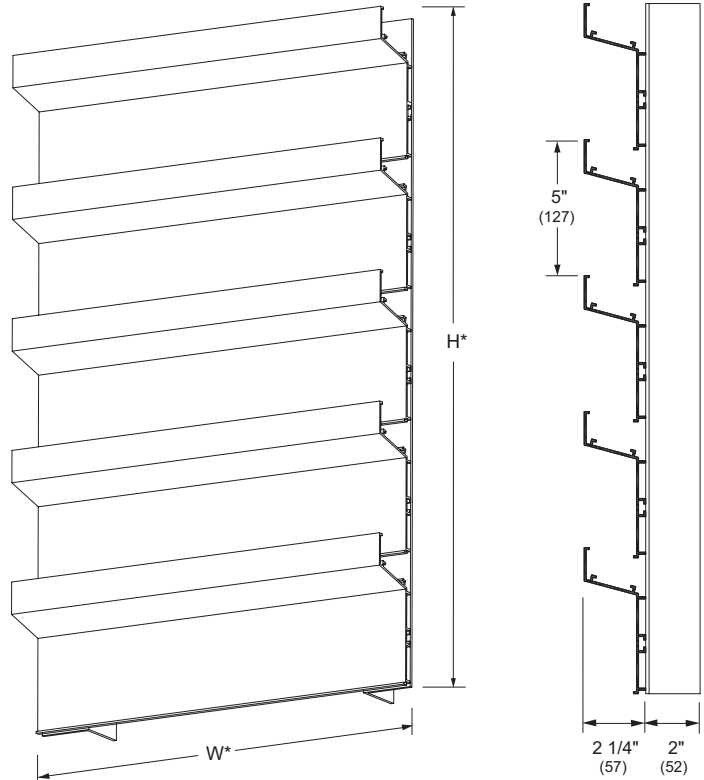


Model **HZ-200**
 (standard)

*Dimensions furnished
 approximately 1/2" (13) undersize.

Vertical Section

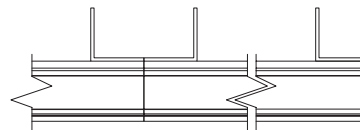

Vertical Mullion
 (standard)



Horizontal Mullion
 (standard)