

## Application

The SV-445 formed steel louver is designed for intake and exhaust application where line-of-sight protection is critical. The SV-445 is available in a wide array of painted finishes including custom color matching.

## Standard Construction

**Material:** Galvanized steel.

**Frame:** 4" deep × 20 ga. thick (102 × 1) channel.

**Blades:** 45° × 20 ga. (1) thick chevron style.

**Screen:** 1/2" × 0.063" (12.7 × 1.6) expanded and flattened aluminum.

**Mullion:** Visible.

**Minimum Size:** 12" × 12" (305 × 305)

**Maximum Size:** Single section: 48" × 96" (1219 × 2438)  
Multiple section: Unlimited

## Options



- Factory finish:
  - Polyester Powder
  - Baked Enamel
  - Prime Coat
- 1 1/2" (38) flange frame.
- Welded construction.
- Alternate bird or insect screens.
- Insulated or non-insulated blank-off panels.
- Filter racks.
- Hinged frame.
- Heavy duty 16 ga. (1.6) construction.
- 304 stainless steel construction.

## Ratings

**Free Area:** [48" × 48" (1219 × 1219) unit]: 6.1 ft<sup>2</sup> (0.56 m<sup>2</sup>)  
38.0%

### Performance @ Beginning Point of Water Penetration

**Free Area Velocity:** 600 fpm (3.05 m/s)  
**Air Volume Delivered:** 3,648 cfm (1.72 m<sup>3</sup>/s)  
**Pressure Loss:** 0.25 in.wg. (62 Pa)

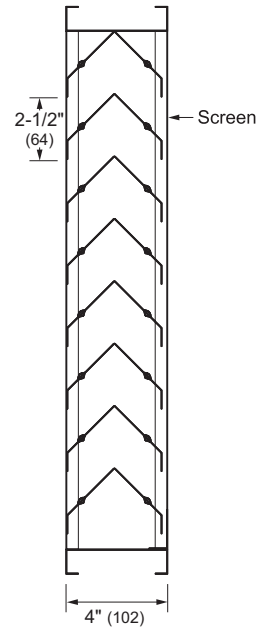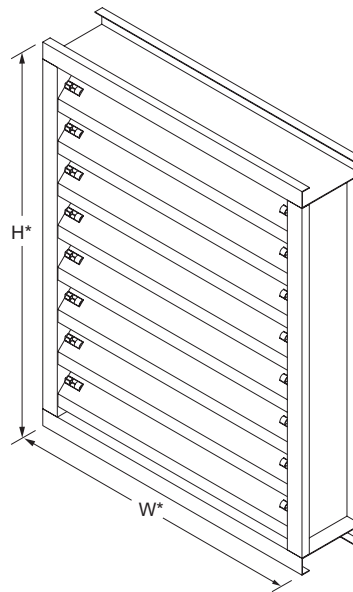


Model **SV-445**  
(standard)


\*Louvers dimensions furnished approximately 1/2" (13) undersize.

**Vertical Section**


†Screen adds approximately 3/16" (5) to louver depth.

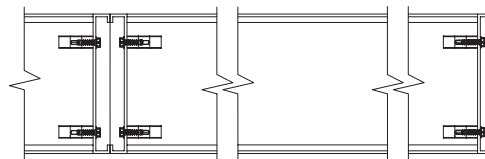

**Vertical Mullion**  
(standard)



**Horizontal Mullion**  
(standard)



**Flange Frame**  
(optional)